

INVESTIGATION OF DIFFERENT IMPELLER CONFIGURATION ON ANAEROBIC CO-DIGESTION OF MANURE AND ORGANIC WASTE FOR BIO-METHANE PRODUCTION

Nattadon Pannucharoenwong^{1,*}, Phadungsak Rattanadecho¹, Victoria Timchenko², and Snunkhaem Echaroj¹

Received: Mar 21, 2019; Revised: August 12, 2019; Accepted: August 12, 2019

Abstract

This research aims to study the influence of the type of impeller on the anaerobic co-digestion of manure and organic waste obtained from supermarket. Each type of impeller used for biogas production have different configuration. The anaerobic digestion is carried out in a pilot-scale plastic digester attached to a water-displacement system to measure the volume of biogas produced over time. Three distinct type of impellers were observed such as the straight blade (6-SB), marine blade (6-MP) and pitch blade (4-PB). For this experiment the anaerobic congestion was monitored over a period of 90 days. Data collection included both biogas production rate and pH level during anaerobic digestion. Results demonstrated an improvement in biogas production due to the presence of agitation inside the digester. Agitation from an impeller with dominating axial flow pattern provided a more stable biogas production even though the organic loading rate is relatively high. An increase in average biomethane composition from 50% to 63% and the biogas production rate from 0.2 to 0.6 m³/kgvs resulted when 6-MB was used instead of 6-SB.

Keywords: Impeller, anaerobic digestion, methane production

Introduction

The industries for production of clean and sustainable source of energy will play an even greater role in the future because they serve as an important platform for electric vehicle technology which will replace internal combustion engines. Biogas is composed of

¹ Department of Mechanical Engineering, Thammasat University, Pathumthani, 12120, Thailand. E-mail: pnattado@engr.tu.ac.th

² School of Mechanical and Manufacturing Engineering, the University of New South Wales, Sydney, 2052 Australia.

* Corresponding author

methane which can provide high heating value for electricity production when used to turn the turbine in an electric generator. Biogas is produced through a bacterial no oxygen environment mechanism known as anaerobic digestion. Approximately 2.5 kWh of electricity can be generated per combustion of 1 m³ of purified biogas. The Minister of Energy in Thailand set a capacity target to produce 300 MW of electricity by 2036 (Arshad *et al.*, 2018).

Implementation of the biogas production process through anaerobic digestion as a source of renewable energy has increased dramatically over the past decade. Anaerobic digestion is the biological process in which micro- organism consumed biodegradable waste or volatile solid (VS) and converted them to methane (CH₄) gas (Erdoğan *et al.*, 2015). It is estimated that the combustion of 1 m³ of methane-rich gas can generated 2.5 kWh of electricity, which is a promising source of clean energy to prepare for electric vehicle in the future (Parthasarathy *et al.*, 2016). In central Europe most biogas power plants now operate on lignocellulosic energy crops such as cereals, sugar beet, grass, corn- stover and maize (Manzanares *et al.*, 2017). Biogas production is a promising source of energy for Thailand due to high agricultural capabilities. Additionally, biogas usage for transportation also help lighten the awareness regarding the climate change (Bragg *et al.*, 1995; Wang *et al.*, 2017).

Anaerobic digestion of vegetable waste was found to be a difficult endeavor due to high content of lignocellulose content (Ruile *et al.*, 2018). Various pretreatment technique was employed to loosen the lignin gripped, which make it easier for micro-organism to have access to cellulose and hemicellulose content (Chen *et al.*, 2017; Lebranchu *et al.*, 2017). Ultrasonic technology for pretreatment have been employed for pretreatment of vegetable and fruit waste before digestion. Although the energy output obtained from biogas production after ultrasonic- assisted pretreatment of vegetable waste is twice the energy input, the cavitation technology is still relatively expensive (Murphy *et al.*, 2011;

McEniry and O'Kiely 2013; Dutta *et al.*, 2018). Sitorus *et al.* (2017) reported an anaerobic digestion of fruit and vegetable waste to offer production of biogas with as high as 65% methane content. Organic loading rate (OLR) was found to have major impact on the stability of biogas production process. An increase in OLR higher than 1.5 g VS/(L d) was observed to have a negative impact on long term production of biogas, which is usually indicated by a decline in pH level (Prasad *et al.*, 2007; Singh *et al.*, 2007).

Micro- organism and substrate suspension inside anaerobic digester is an important condition that need to be maintain in order to achieve a stabled high methane production rate (Rashid *et al.*, 2013). Additionally, an effective mixing strategy can reduce the mixing time required per hour, which will significantly reduce energy consumption of the anaerobic digestion process (Ravi *et al.*, 2018). The impeller's geometry was found to have a significant effect on mixing intensity and torque. Olmos *et al.* (2017) documented a significant increase in both torque and mixing intensity when a double helical impeller was used instead of Rushton blade impeller. An increase in the number of blade was found to enhance the torque and shearing force of the agitation motion, which resulted in a homogeneity improvement in co-precipitation process (Siddique *et al.*, 2017). Impellers that initiate an axial or mixed flow pattern (including hydrofoil and pitched blades) consumed less energy compared with impellers (radial turbine) that offered only radial flow pattern. An increase in the angle of pitched blade up to 45° was observed to reduce energy consumption as well (Murphy *et al.*, 2012; Panjaitan *et al.*, 2013).

The researches goal is to study the influence of agitator type and organic loading rate on the stability of anaerobic co-digestion for biogas production from vegetable waste and pig manure. Three types of agitator were employed including 6-blade marine impeller, 6-straight blade impeller, and 4-pitched blade impeller. The organic loading rate were controlled at 1, 1.5, 2, and 2.5 g VS/(L d). Results from this work suggest that the agitator

type play an important role in methane generation. Knowledge obtained from this research was successfully implemented at Rachaburi Municipality.

Experimentals

Materials

Pig manure for anaerobic inoculum was obtained from a pig farm in Rachaburi province. The COD content of pig manure collected from the pig farm is 42.3 g/L. Rachaburi province has a relatively large population, therefore waste disposal management is a critical problem. The vegetable residual at community market. The vegetable residual was dried and mechanically chopped into smaller pieces ($<1 \text{ cm}^2$).

Digester Set-up and Operation

Reactor with 34 cm diameter consists of two valves for controlling water level and releasing anaerobic sludge after digestion as shown in Figure 1. A 5 cm diameter pipe installed through the tank was used as an inlet for waste organic loading as shown in Figure 2. The inlet pipe is also designed to be submerge under anaerobic sludge in order to prevent biogas generated to leak out of the digester. Additionally, smaller pipe (2 cm diameter) is also inserted in the middle of the tank in order to locate the shaft which is attached to a motor (Panasonic 90 W, gear ratio 1:3). The dimension and location of the impeller relative to the tank is designed according to the geometric proportion principles, which state that the blade need to have a diameter of $1/3$ of tank's diameter and the length of the impeller from the bottom of the tank need to be equal to the diameter of the impeller (Wang *et al.* 2012). Different type of impellers are shown in Figure 3.

For this experiment, the anaerobic digestion is carried out in a semi-continuous mode at room temperature, which mean that organic waste (60% vegetable and 40% pig manure) are fed once every day and the exact volume of the anaerobic sludge is withdrawn from the digester through the bottom valve.

For the first 20 days of the operation the OLR was controled at 1 g VS/(L d). From day 21 to 40 the OLR was increased to 1.5 g VS/(L d), the OLR increased again to 2 g VS/(L d) during a duration of day 41 to 60 and lastly 2.5 g VS/(L d) from day 61 to 90. The impellers were used to mix the anaerobic sludge once a day for 5 h at 30 rpm.

Analytical Method

The Volatile Solid (VS) content of both vegetable waste and pig manure was measured

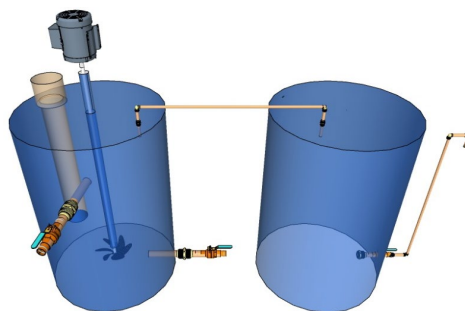


Figure 1. Anaerobic digestion system for methane production from organic waste

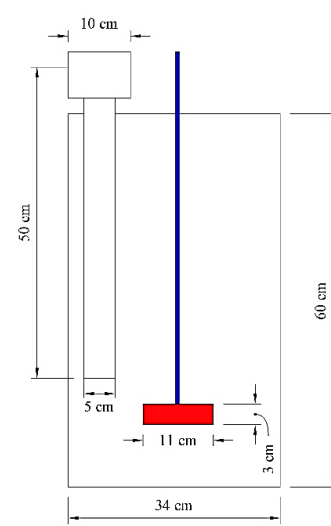


Figure 2. Diagram of the dimension of anaerobic digester and impeller position

by heating the material from room temperature to 550°C in an oven (rate of heating was 10°C per min). The VS content is calculated as the difference between the weight of dried material and the weight of ashes that is leftover after the heating. The methane content of biogas in percentage is measured externally by a portable gas analyzer, Vapor Analytical Bio Genious - 02, with an accuracy of $\pm 10\%$. A water displacement system is employed to monitor the biogas production rate which was found to have an accuracy of $\pm 0.01 \text{ m}^3/\text{kg}_{\text{VS}}$. The pH level is measured by a pH meter (Hanna Instrument) with an accuracy of ± 0.1 pH.

Results and Discussion

Characteristic of Each Impeller

For this research three different types of impeller were investigated including 6-blade marine (MP-6), 6-straight-blade (SB-6), and 4-pitched-blade 30° (PB-6). Each type of impeller have different characteristics such as the Power Number (N_p) and flow pattern as shown in Table 1. N_p indicated the power required to turn the impeller during agitation, which is related to the energy consumption of each impeller. A higher N_p value mean that more power is required to rotate the impeller which suggest a greater energy consumption (Zeynali *et al.*, 2017). It can be observed that N_p of impeller decrease in this order SB-6 > GA > PB-6 > MP-6. It is also important to observe that SB-6 demonstrated a radial flow pattern which means that the mixing will occur mostly perpendicular to the impeller. On the other hand, the axial type impeller created motion both on top and bottom of the impeller.

Effect of Impeller Type and OLR

The effect of each type of impeller is monitored for 90 days from anaerobic digestion of vegetable waste and pig manure. The OLR was controlled at 1 g VS/(L d) for 20 days, 1.5 g VS/(L d) for another 20 days, 2.0 g VS/(L d) for the next 20 days and 2.5 g VS/(L d) for the last 30 days. According to Figure 4, the anaerobic digestion during the startup phase (first 20 days)

without an impeller gave biogas production rate of approximately $0.18 \text{ m}^3/\text{kg}_{\text{VS}}$. An increase in OLR to 1.5 and 2.0 g VS/(L d) cause a slight increase in biogas production to $0.22 \text{ m}^3/\text{kg}_{\text{VS}}$. However, a further increase in OLR to 2.5 g VS/(L d) resulted in a reduction in the biogas production rate. This is because of an increase in food per mass ratio which favour the hydrolysis bacteria causing the pH to drop to level 5.

Installation of a 6-blade straight impeller is also shown in Figure 4. An increase in biogas production rate was observed compared with the anaerobic digestion without impeller. This indicate the impact of the SB-6 impeller. The highest biogas production rate from a SB-6 impeller was approximately $0.42 \text{ m}^3/\text{kg}_{\text{VS}}$. However, similar to anaerobic digestion without the impeller, an increase in OLR to 2.5

Table 1. Summary of characteristic of different type of impeller observed in the research

Type	Code	Flow pattern	N_p
6-straight blade	SB-6	Radial	5.59
4-pitched blade	PB-4	Mix	0.66
6-blade Marine	MP-6	Axial	0.32

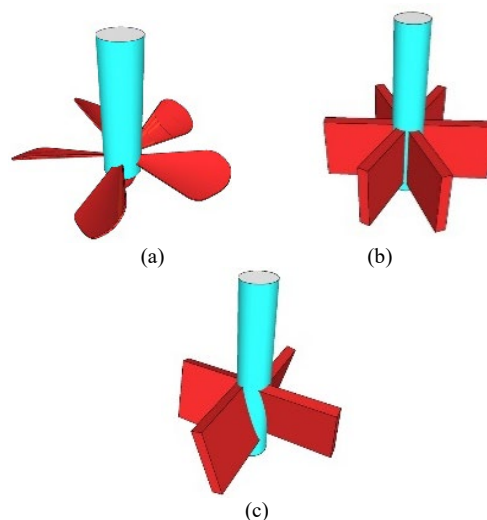


Figure 3. Different configuration impellers: 6-blade marine a) 6-straight-blade b) and 4-pitched-blade 30°

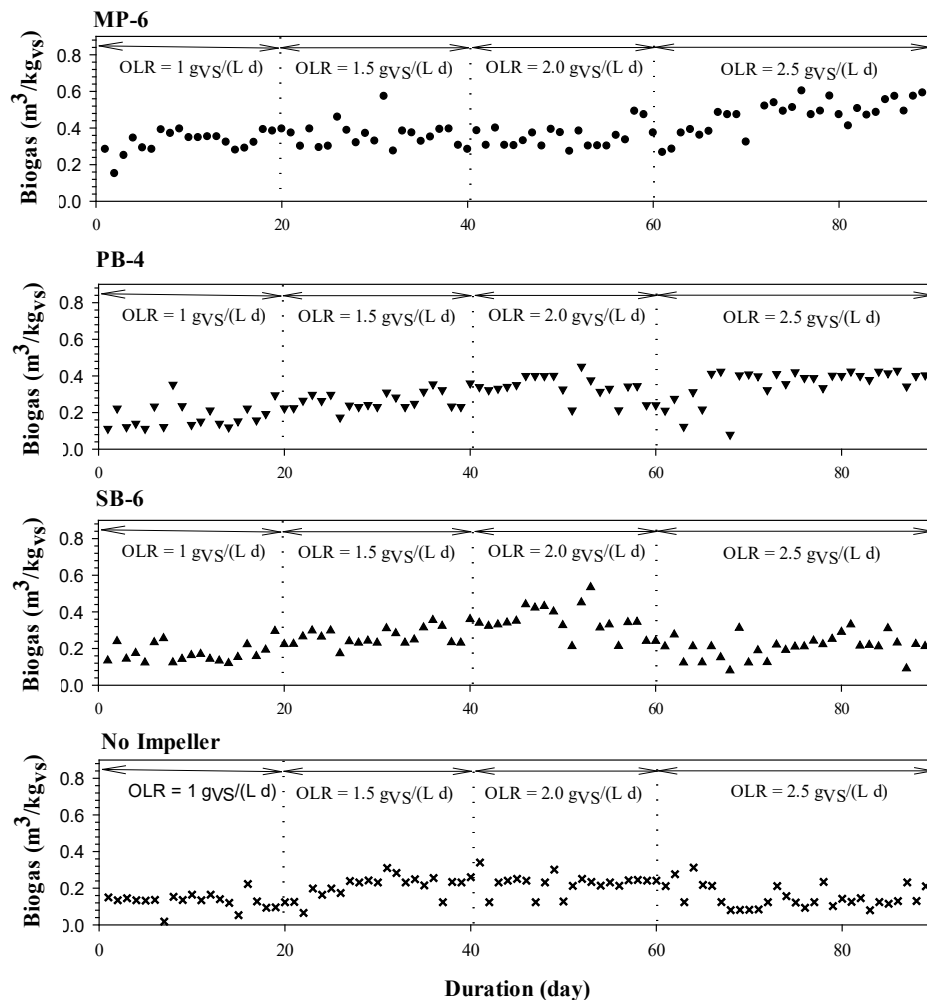


Figure 4. Biogas production rate from anaerobic digestion with no impeller, with 6-straight blade, 4-pitched blade, and 6-marine blade propeller

$\text{g VS}/(\text{L d})$ also cause the biogas production rate to reduce due to the overwhelming concentration of substrate inside the digester. When the impeller was changed from the SB-6 to PB-4, it was observed that there is a gradual increase after the OLR was adjusted from 1.0 to 2.0 $\text{g VS}/(\text{L d})$. Unlike the anaerobic digestion system without an impeller and the one with a SB-6 impeller, an increase in OLR further to 2.5 $\text{g VS}/(\text{L d})$ does not cause the biogas production rate to decrease. The biogas production rate remained steady at approximately

0.40 $\text{m}^3/\text{kg}_{\text{VS}}$ even after 60 days of operation. An enhancement in anaerobic digestion is clearly shown in Figure 2 after installation of a MP-6 impeller. It can be observed that an axial flow behavior of the impeller have a positive effect on stability of biogas production. The biogas production rate from a MP-6 impeller increased gradually to as high as 0.6 $\text{m}^3/\text{kg}_{\text{VS}}$ after the OLR was adjusted to 2.5 $\text{g VS}/(\text{L d})$.

Figure 5 illustrate the average methane content of biogas production from anaerobic digestion (60 to 90 days of operation) using the

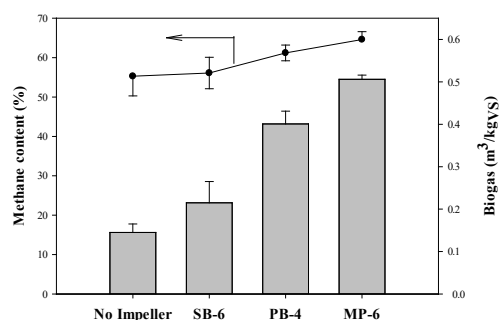


Figure 5. Averaged methane content and biogas production rate monitored from 60 to 90 days of anaerobic digestion

three different impellers. An increase in average methane content was observed as the anaerobic digestion without impeller is compared with the agitated system. As the impeller was changed from radial flow (SB-6) to axial flow (MP-6), averaged methane content included to 63%.

Conclusions

Anaerobic digestion was successfully performed in a semi-continuous pilot-scale digester. Biogas with high methane purity produced can be compressed to CNG for vehicle transportation and combusted to generate electricity. The installation of agitator inside the digester was observed to have a positive effect on the rate of biogas production. Anaerobic digestion with MP-6 propeller was found to give the highest and the most stable production of methane compared with PB-4 and SB-6, which indicate the effectiveness of axial flow pattern compared with mix and radial flow.

Acknowledgements

This researched were supported by Faculty of Engineering Research Fund, Thammasat University. The authors would also like to thank Chinfarm Radburi and Sri Muang Fruit and Vegetable Central Market Ratchaburi for providing substrate and vegetable wastes.

References

- Arshad, M., Bano, I., Khan, N., Shahzad, M.I., Younus, M., Abbas, M., and Iqbal, M. (2018). Electricity generation from biogas of poultry waste: An assessment of potential and feasibility in Pakistan. *Renew. Sustain. Ener. Rev.*, 81:1,241-1,246.
- Aylin Alagöz, B., Yenigün, O., and Erdinçler, A. (2015). Enhancement of anaerobic digestion efficiency of wastewater sludge and olive waste: Synergistic effect of co-digestion and ultrasonic/ microwave sludge pre-treatment. *Waste Manage.*, 46:182-188.
- Davoody, M., Abdul Raman, A. A., and Parthasarathy, R. (2016). Agitation energy efficiency in gas–solid–liquid stirred vessels operating at ultra-high solids concentrations. *Chem. Eng. Res. Des.*, 111:34-48.
- Duque, A., Manzanares, P., and Ballesteros, M. (2017). Extrusion as a pretreatment for lignocellulosic biomass: Fundamentals and applications. *Renew. Ener.*, 114:1,427-1,441.
- Holland, F. A. and Bragg, R. (1995). 5-Mixing of liquids in tanks *Fluid Flow for Chemical Engineers*. 2nd ed. Oxford: Butterworth-Heinemann, p. 164-188.
- Jiang, Z., Zhang, L., Yao, Q., Wei, S., Zhou, T., Ben, Y., and Wang, Y. (2017). Agitator dependent homogeneity enhancement of co-precipitation reaction for improving the dispersibility of precursors and Y2O3 powders. *Ceram. Int.*, 43(18):16,121-16,127.
- Kress, P., Nägele, H.-J., Oechsner, H., and Ruile, S. (2018). Effect of agitation time on nutrient distribution in full-scale CSTR biogas digesters. *Bioresource Technol.*, 247:1-6.
- Lebranchu, A., Delaunay, S., Marchal, P., Blanchard, F., Pacaud, S., Fick, M., and Olmos, E. (2017). Impact of shear stress and impeller design on the production of biogas in anaerobic digesters. *Bioresource Technol.*, 245:1,139-1,147.
- Li, D., Chen, L., Liu, X., Mei, Z., Ren, H., Cao, Q., and Yan, Z. (2017). Instability mechanisms and early warning indicators for mesophilic anaerobic digestion of vegetable waste. *Bioresource Technol.*, 245:90-97.
- McEniry, J. and O’Kiely, P. (2013). Anaerobic methane production from five common grassland species at sequential stages of maturity. *Bioresource Technol.*, 127:143-150.
- Murphy, J., Braun, R., Weiland, P., nad Wellinger, A. (2011). Biogas from crop digestion. Task 37 - Energy from Biogas. IEA Int. Energy Agency Bioenerg. Retrieved from <http://www.iea-biogas.net/content/publications/publications.php>.
- Paul, S. and Dutta, A. (2018). Challenges and opportunities of lignocellulosic biomass for anaerobic digestion. *Resour. Conserv. Recy.*, 130:164-174.
- Prasad, S., Singh, A., Jain, N., and Joshi, H. C. (2007). Ethanol Production from Sweet Sorghum Syrup for Utilization as Automotive Fuel in India. *Energ. Fuels*, 21(4):2,415-2,420.
- Prasad, S., Singh, A., and Joshi, H. C. (2007). Ethanol as an alternative fuel from agricultural, industrial and urban residues. *Resour. Conserv. Recy.*, 50(1):1-39.

- Rashid, T., Rizvi, Z., and Malik, Dr. (2013). Study the effect of impeller design on power consumption. *J. Adv. Chem. Eng.*, 4(1):21-24.
- Ravi, P.P., Lindner, J., Oechsner, H., and Lemmer, A. (2018). Effects of target pH-value on organic acids and methane production in two-stage anaerobic digestion of vegetable waste. *Bioresource Technol.*, 247:96-102.
- Siddique, M. N. I., Munaim, M. S. A., and Wahid, Z. B. A. (2017). The combined effect of ultrasonic and microwave pre-treatment on bio-methane generation from co-digestion of petrochemical wastewater. *J. Clean. Prod.*, 145:303-309.
- Sitorus, B., Sukandar, and Panjaitan, S.D. (2013). Biogas recovery from anaerobic digestion process of mixed fruit-vegetable wastes. *Energy Procedia*, 32:176-182.
- Thamsiriroj, T., Nizami, A. S., and Murphy, J.D. (2012). Why does mono-digestion of grass silage fail in long term operation? *Applied Energy*, 95:64-76.
- Wang, S., Boger, D.V., and Wu, J. (2012). Energy efficient solids suspension in an agitated vessel-water slurry. *Chem. Eng. Sci.*, 74:233-243.
- Zeynali, R., Khojastehpour, M., and Ebrahimi-Nik, M. (2017). Effect of ultrasonic pre-treatment on biogas yield and specific energy in anaerobic digestion of fruit and vegetable wholesale market wastes. *Sustain. Environ. Res.*, 27(6):259-264.